

# Technical information

## Roof

Sheet metal

Batten 28x95

Vented batten 28x45

Windproof membrane

Timber frame 45x170/  
Insulation 175mm

OSB-3 Board 12mm

Cladding (STF 12x120) 12mm

## Interior wall

Cladding (STF 12x120) 12mm

Building paper

Timber frame 45x95 / Insulation  
100mm

Building paper

Cladding (STF 12x120) 12mm

## Interior wall - wet room

Ceramic tile 10mm

Waterproofing

Water-resistant gypsum plasterboard 13mm

Timber frame 45x95 / Insulation 100mm

Building paper

Cladding (STF 12x120) 12mm

## External wall

Cladding (UYS 20x120)

Horizontal batten 28x45

Vertical batten 21x45

Windproof membrane

Timber frame 45x145 / Insulation 150mm

OSB-3 Board 12mm

Cladding (STF 12x120)



## Floor

Parquet

OSB-3 Board 22mm

Wooden frame 45x195 / Insulation  
200mm 195mm

OSB-3 Board 12mm(treated)

Rodent net

# Sanitary installations and heating


Toilet - GROHE  
EURO CERAMIC 4-IN-1



Shower system -  
HANSGROHE  
CROMETTA S 240



Boiler - ARISTON  
VELIS EVO-50

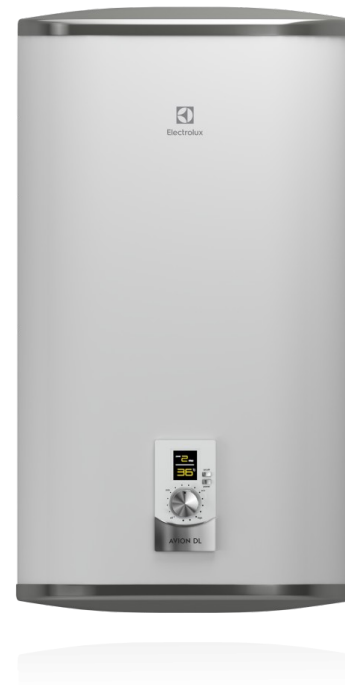

Underfloor  
heating -  
BVF 701



WC-shower room

